


JQX-40F-1Z 功率继电器



订货须知:

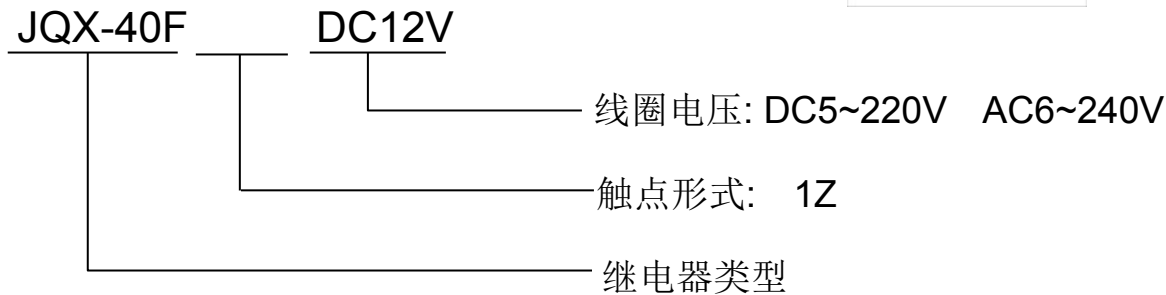

规格:

触点形式	1C,1A,1B
触点电阻	100mΩ (1A 6VDC)
触点材料	AgCdo
接触容量	40A 250VAC 30VDC
绝缘电阻	1000MΩ, 500VDC
耐电强度	BCC2500VAC 1minute
	BOC1200VAC 1minute
吸合时间	25ms /25ms
安装方式	螺丝
额定线圈功率	DC2.0W AC2.5VA

线圈规格表:

额定电压 VDC	吸合电压 (VDC)	释放电压 (VDC)	线圈电阻 Ω:±10%	额定电压 VAC	吸合电压 VAC	释放电压 VAC	线圈电阻 Ω:±10%
6	4.8	0.60	20	6	4.80	1.80	14.4
12	9.6	1.20	65	12	9.60	3.60	57
24	19.2	2.40	320	24	19.20	7.20	250
48	38.4	4.80	1280	48	38.40	14.4	921
60	80.0	10.0	2800	110/120	88.00	36.0	5000
110	88.0	11.0	9650	220/240	176.00	72.0	19600/25040

尺寸、接线图:

