



H3BA

### 特性

用于时序控制的时间继电器备有板前，板后的连接插座，LED在线指示灯，显示工作状态


### 性能参数

电源电压	AC/DC12V~48V, AC24V~380V 50HZ/60HZ
自由电压	AC/DC24V~240V
功耗	DC1.0W, AC1.0VA
控制输出	5A220VAC
绝缘电阻	DC500V, 100MΩ
介质耐压	-10°C~50°C
湿度	35%~85%
寿命	机械寿命: 10 <sup>6</sup> , 电气寿命: 10 <sup>5</sup>
重量	≈170g

### 订货标记示例

时间继电器H3BA

H3BA - 8 - 10S AC380V

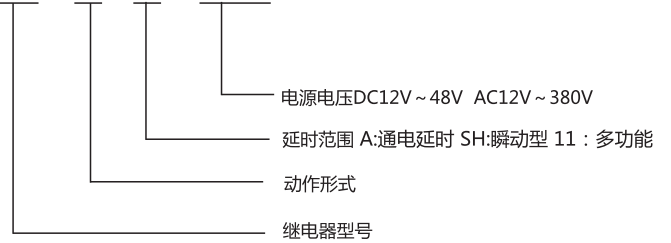


### 时间范围


额定时间	额定时间			10H
	S	M	H	
0.5	0.05-0.5			0.5-5h
1.0	0.1-1			1-10h
5.0	0.5-5			5-50h
10	1-10			10-100h

### 外形图、接线图、安装尺寸

#### H3BA外形图

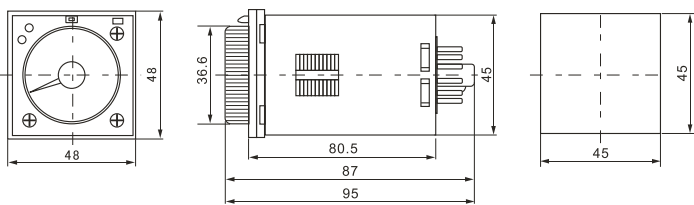

#### H3BA时序图

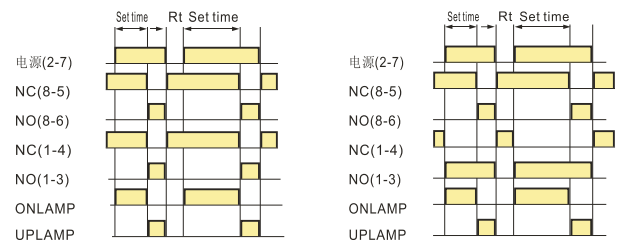

#### H3BA接线图

